All bathtub dimensions are ± 1/2"

Builder Series

Luxury Series

Platinum Series

Combination
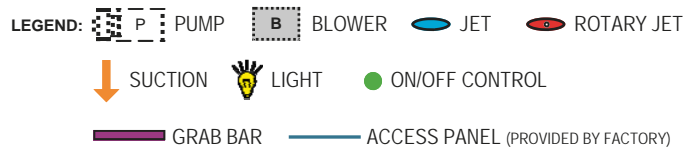(pump and blower location only)

Airbath System II

Airbath System III

N/A

LEGEND: P PUMP   B BLOWER   JET   ROTARY JET

SUCTION   LIGHT   ON/OFF CONTROL

GRAB BAR   ACCESS PANEL (PROVIDED BY FACTORY)

INSTALLATION TIPS
- Install according to Owner's Manual and local codes.
- Access panel for whirlpool and Airbath® systems included with the Atlas.
- Hot water supply should be 65-75% of tub capacity or greater.
- Always consult your local plumber for recommendations as installations will vary.

DIMENSIONS
66" x 40" x 23" (1676 x 1016 x 584 mm)
Whirlpool Operating Gallons = 65 (Liters = 246)
Gallon to Overflow = 95 (Liters = 360)

MATERIAL: Polymer Composite (White and Biscuit only)

TUB FLOOR: Non-Textured

UNDERMOUNT: No

ELECTRICAL REQUIREMENTS
Americh recommends one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.

OPTIONAL ACCESSORIES
- Chromatherapy*
- Grab Bars: 9" * - 14" - 16"
- High Density Insulation*
- Inline Heater (whirlpool only)
- Jets: Additional or Rotary*
- Pillow: Angle *
        13" – Full Back
- Remote Control Upgrade (select series only)
- Syllent Pump with Heated Air*
- Trim Kit Upgrade*
- Waste & Overflow
    - Cable Drive Overflow*
    - Linear Overflow

*Standard on Platinum Series

CODES AND COMPLIANCE
Americh products meet or exceed the following standards:
- Underwriters Laboratories (UL)
- Underwriters Laboratories - Canada (cUL)
- Canadian Standards Association - (CSA)
- ANSI Z124.1 • ANSI A112-19.7
- ANSI A112.19.8
Contact Americh for additional approvals.