

artos

F302-4

INSTALLATION GUIDE

5-hole deck mount tub filler

r+s


BRUSHED NICKEL(BN)



CHROME(CH)



CHROME+BLACK(CHB)



artos

F302-4

OPERATING SPECIFICATIONS

5-hole deck mount tub filler

r+s

FEATURES

Tub Filler with Two Controls
Hand Shower with Separate Control

OPERATING PRESSURE


Minimum: 15 psi
Maximum: 75 psi
Above 90psi it may be necessary to install a pressure reducer

OPERATING TEMPERATURE

Maximum: 176°

FLOW RATE

12.0 USGPM
2.0 USGPM

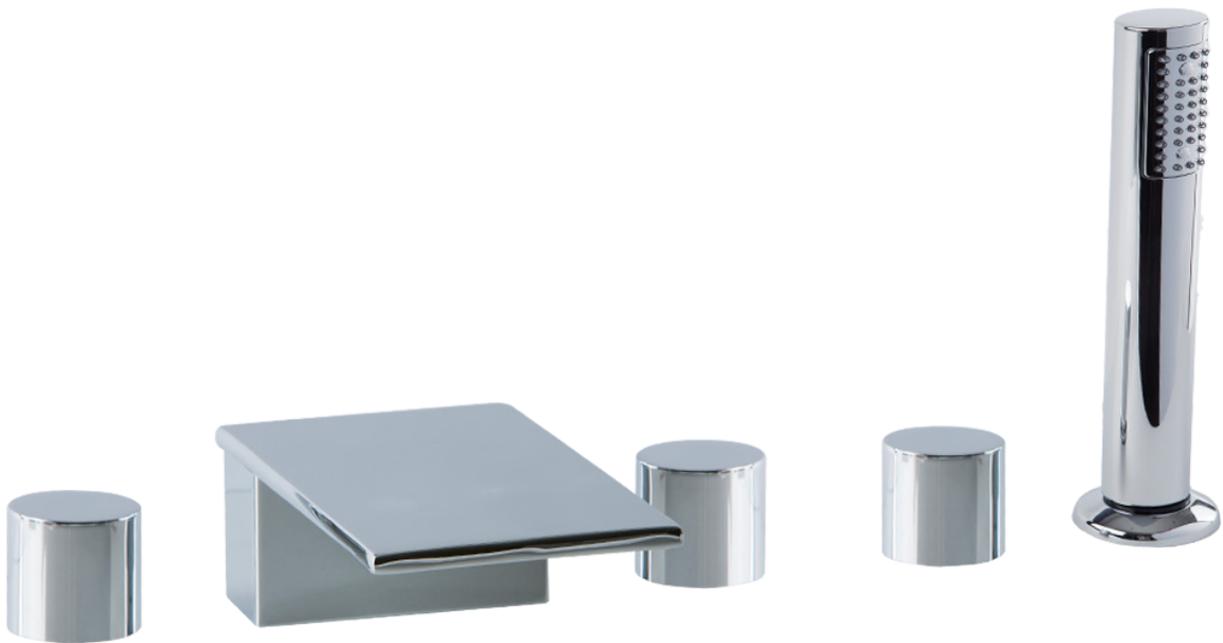


artos

F302-4

PRODUCT DIMENSIONS

5-hole deck mount tub filler

r+s

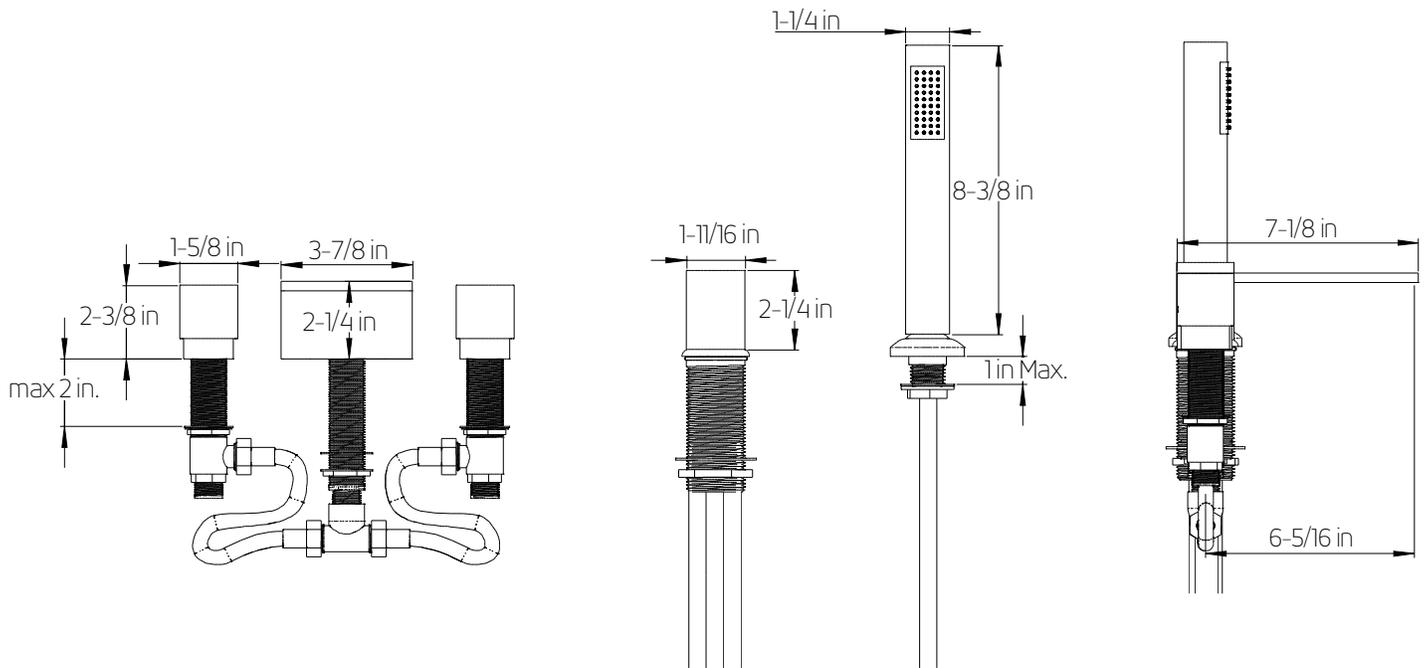


artos

F302-4

5-hole deck mount tub filler


r+s

STEP 1

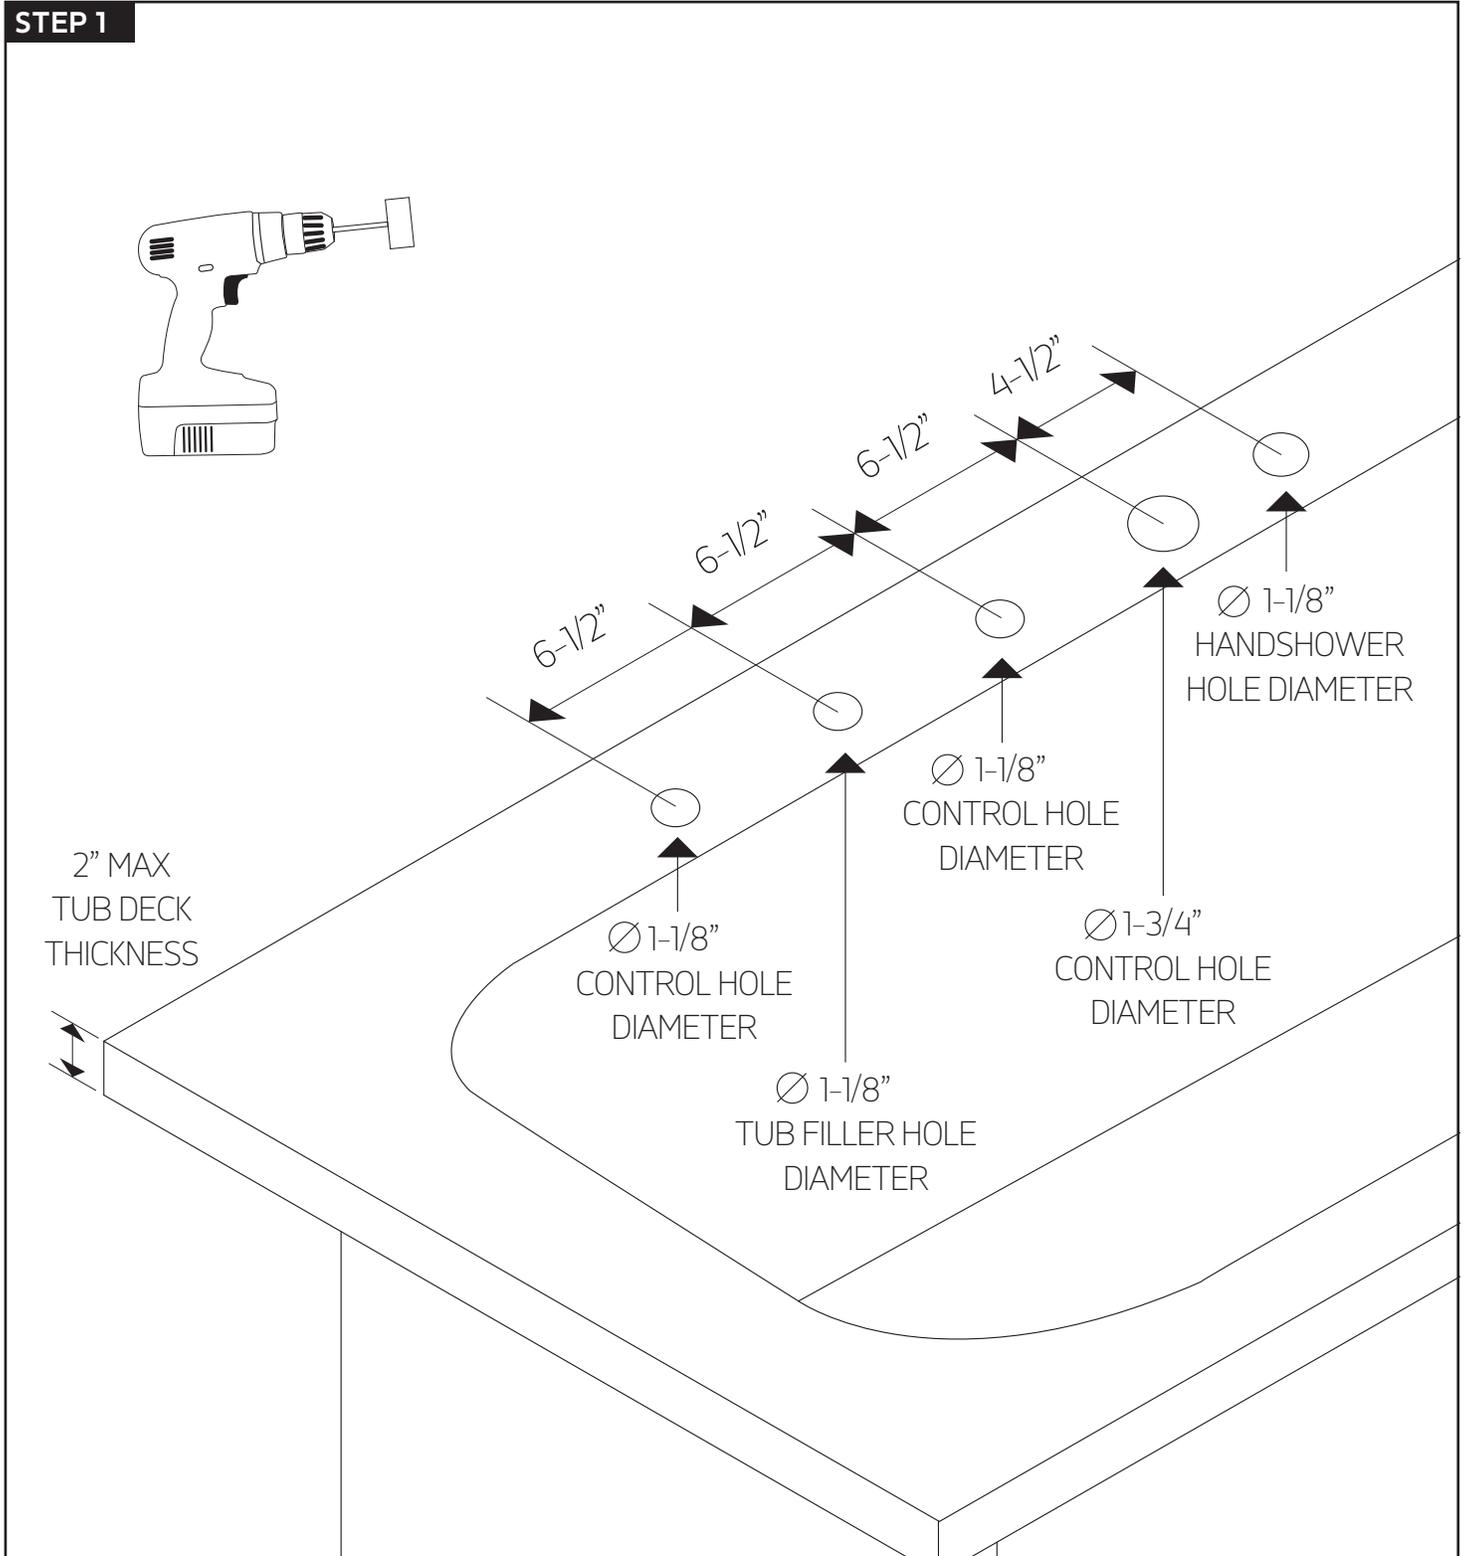

INSTALLATION STEPS

STEP 2

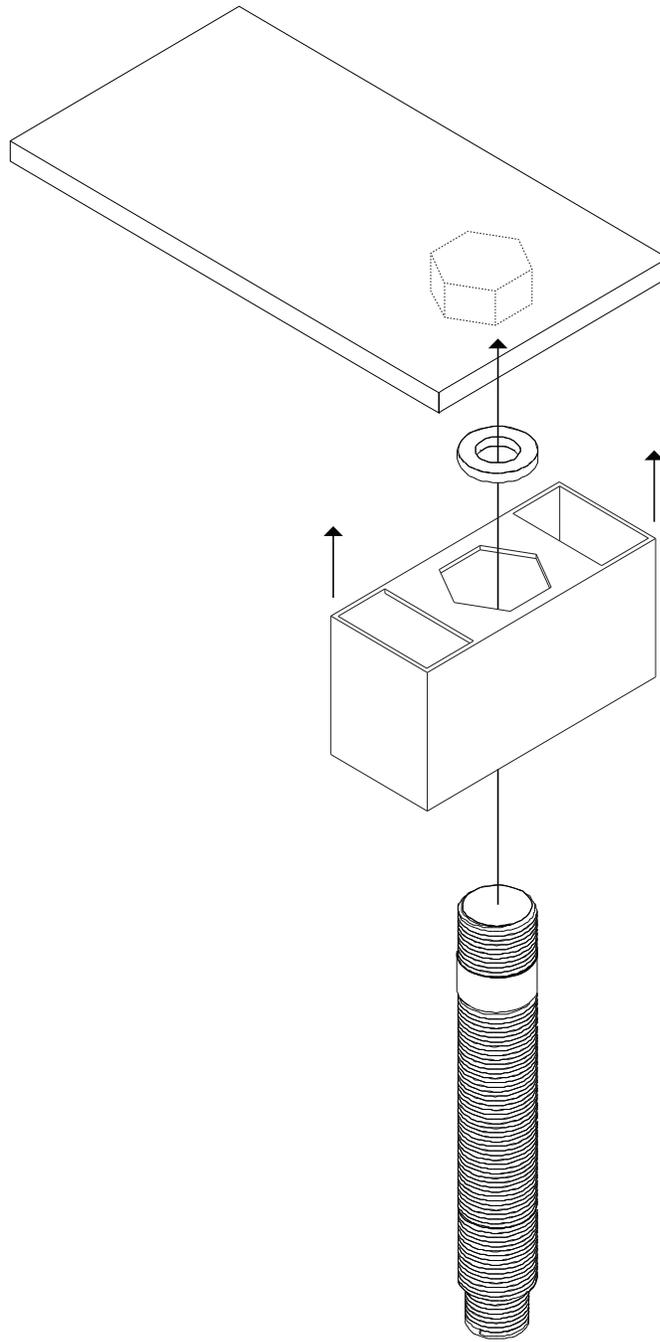


artos

F302-4

5-hole deck mount tub filler


r+s

STEP 3

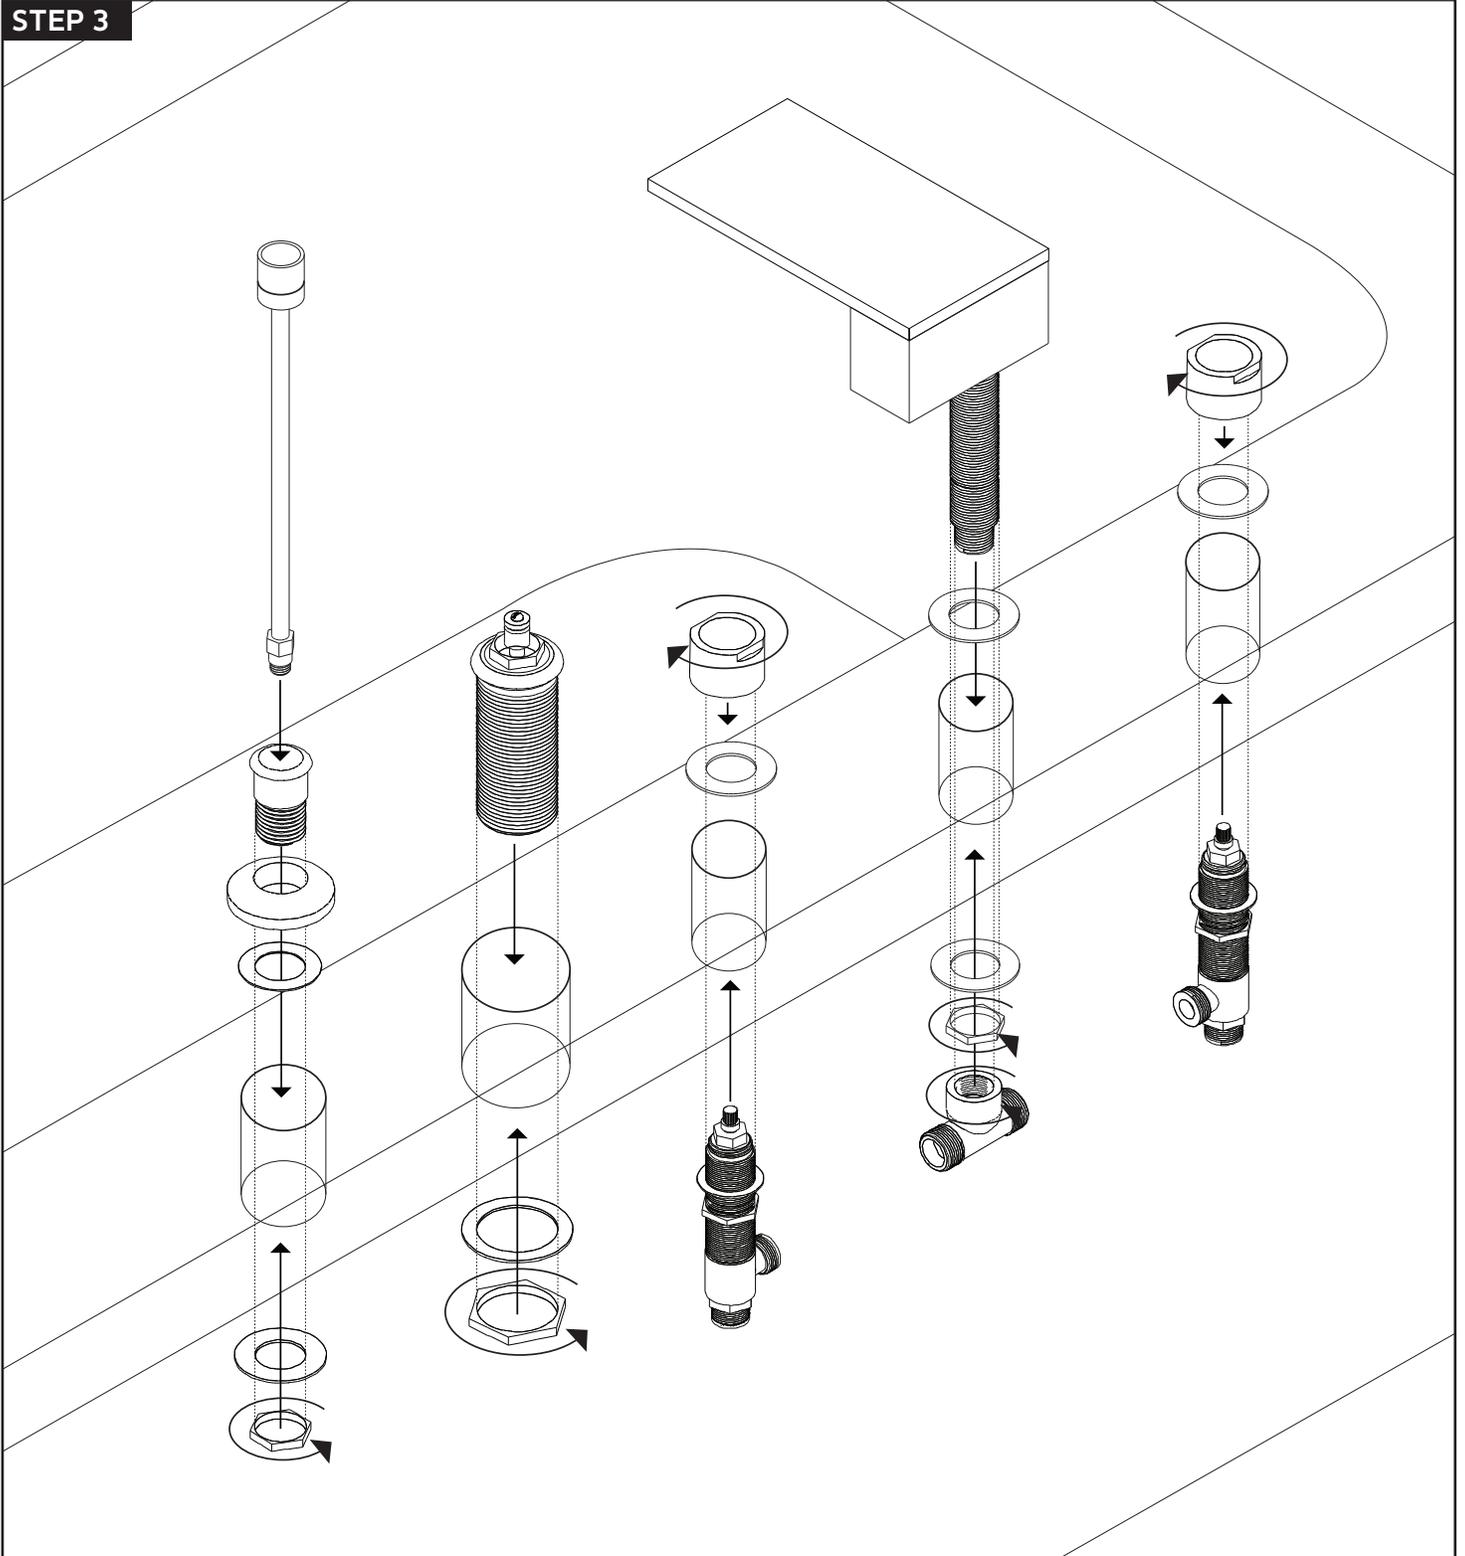

INSTALLATION STEPS

STEP 4

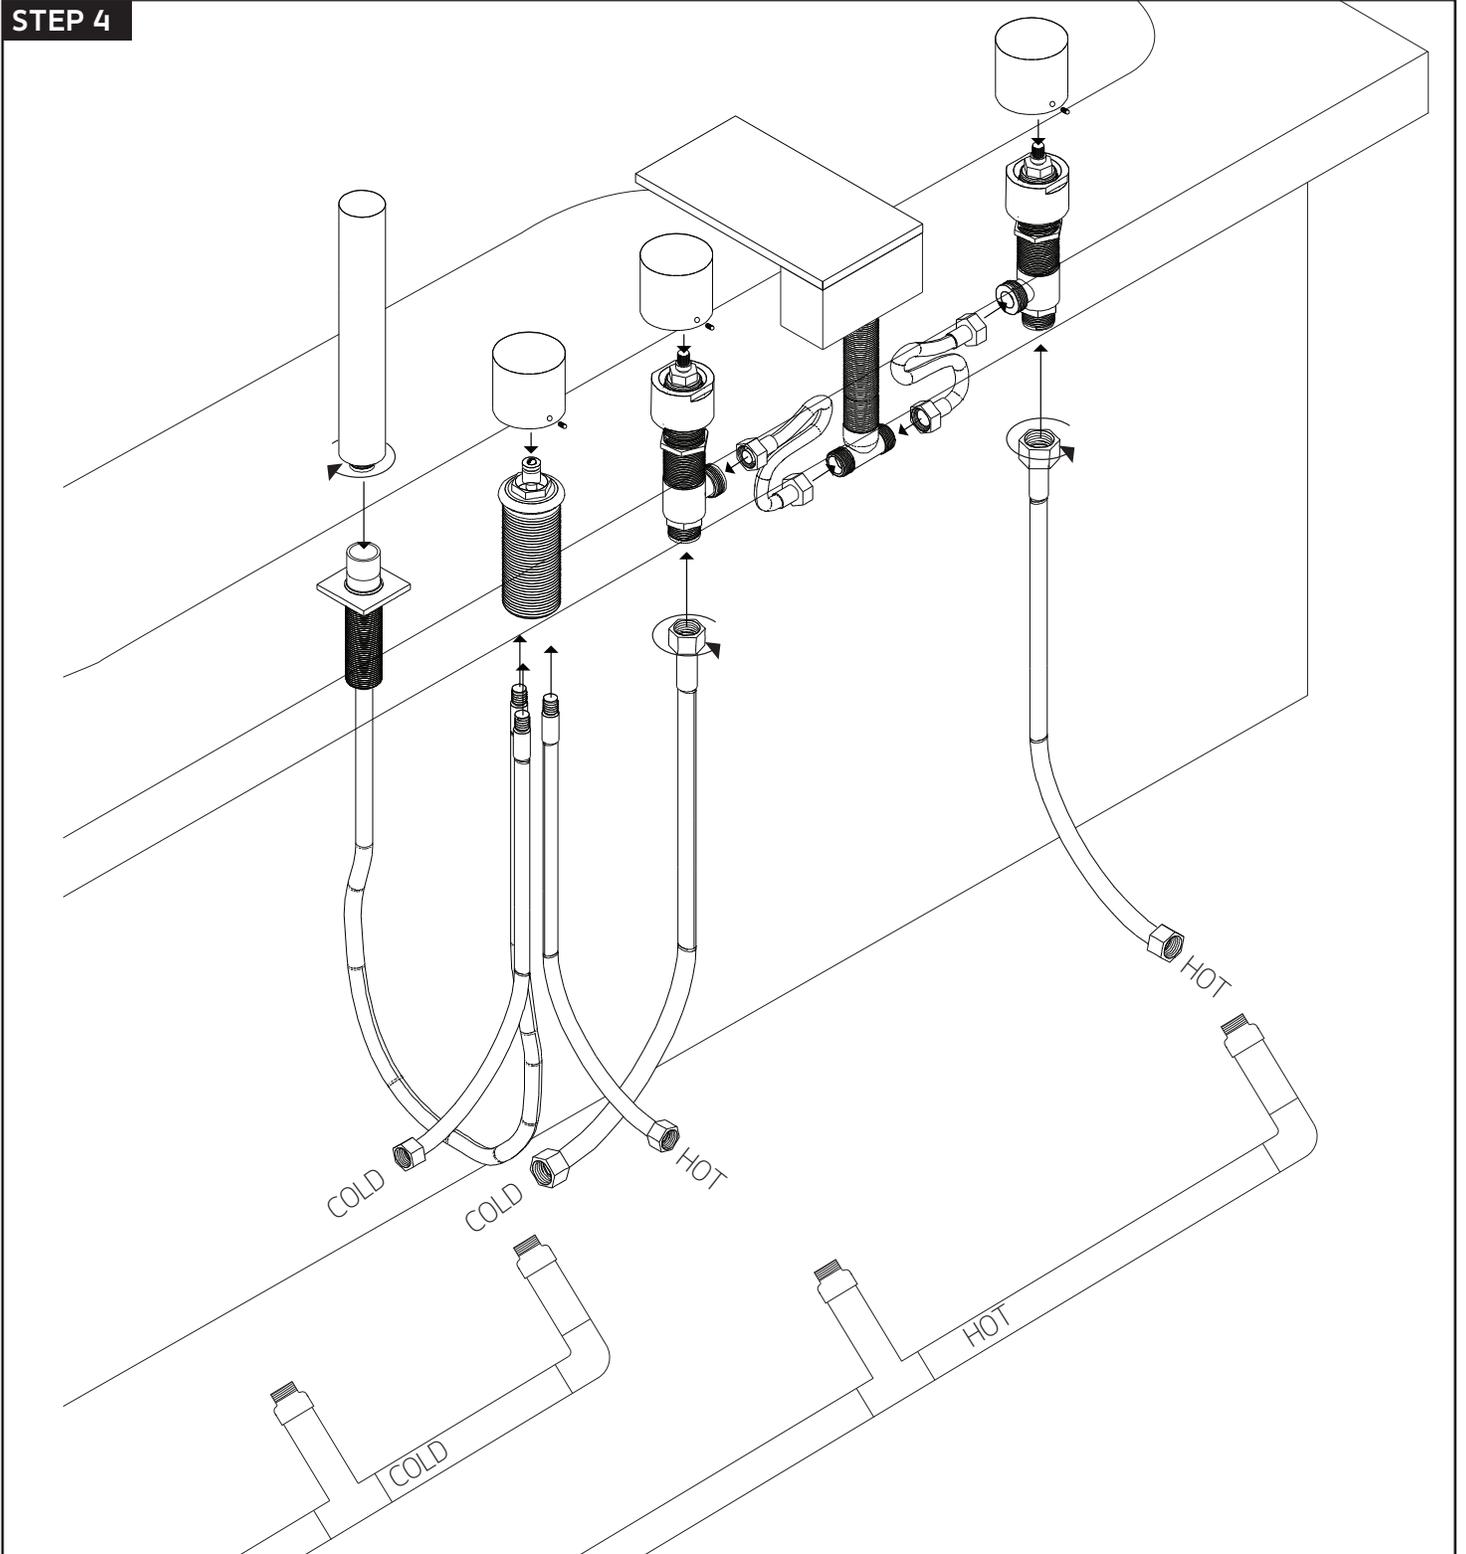


artos

F302-4


5-hole deck mount tub filler

r+s

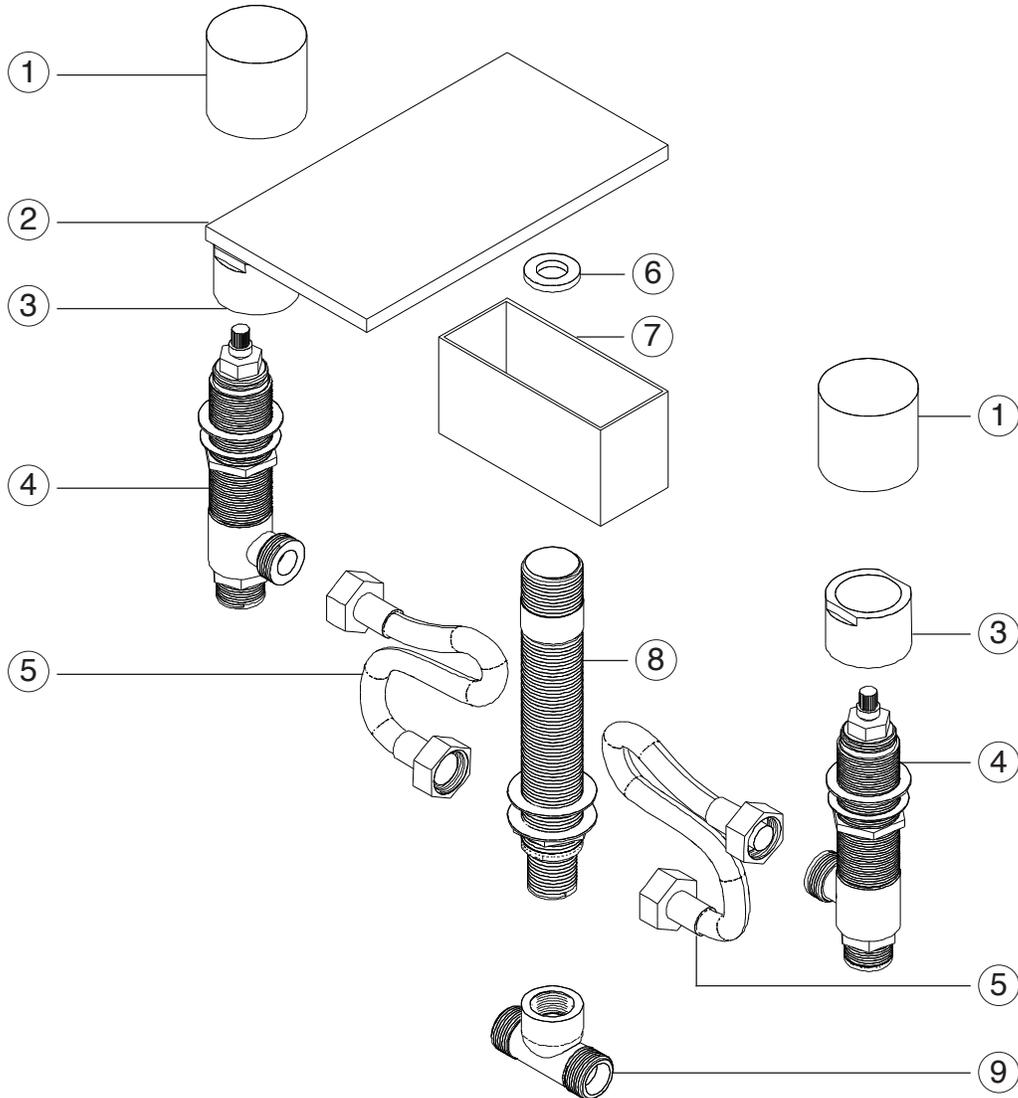

- ① **CONTROL HANDLE** F302-4 XP1
- ② **TUB FILLER SPOUT** F302-4 XP2
- ③ **TUB FILLER CONTROL DRESS RING** F302-4 XP3
- ④ **TUB FILLER CARTRIDGE** F302-4 XP4
- ⑤ **SUPPLY HOSE** F302-4 XP5
- ⑥ **TUB FILLER SPOUT CONNECTOR GASKET** F302-4 XP6
- ⑦ **TUB FILLER BODY** F302-4 XP7
- ⑧ **SPOUT CONNECTOR** F302-4 XP8
- ⑨ **SPOUT SUPPLY CONNECTOR** F302-4 XP9

PARTS BREAKDOWN

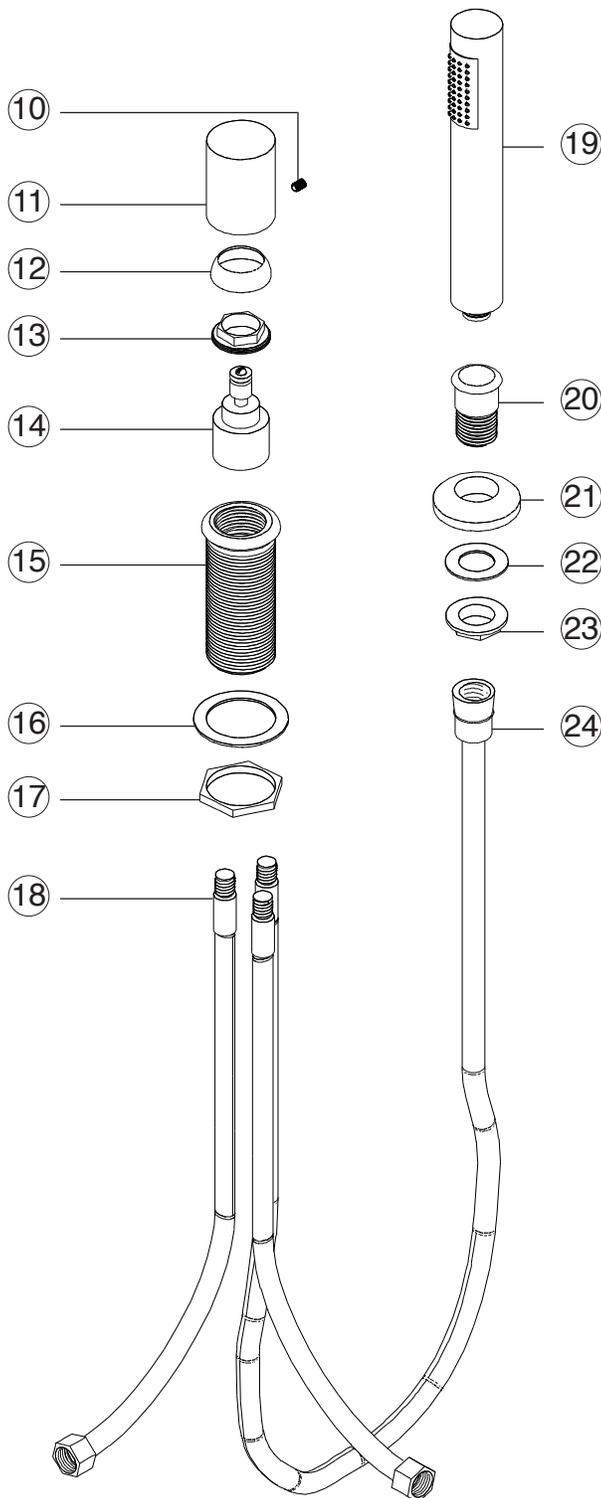

- ⑩ SET SCREW F302-4 XP10
- ⑪ CONTROL HANDLE F302-4 XP11
- ⑫ CONTROL CARTRIDGE DRESS RING F302-4 XP12
- ⑬ CONTROL CARTRIDGE SECURING NUT F302-4 XP13
- ⑭ CONTROL CARTRIDGE F302-4 XP14
- ⑮ CONTROL CONNECTOR F302-4 XP15
- ⑯ CONTROL DECK GASKET F302-4 XP16
- ⑰ CONTROL SECURING NUT F302-4 XP17
- ⑱ SUPPLY HOSE F302-4 XP18
- ⑲ HAND SHOWER F302-4 XP19
- ⑳ HAND SHOWER CONNECTOR F302-4 XP20
- ㉑ HAND SHOWER ESCUTCHEON F302-4 XP21
- ㉒ HAND SHOWER WASHER F302-4 XP22
- ㉓ HAND SHOWER SECURING NUT F302-4 XP23
- ㉔ HAND SHOWER SUPPLY HOSE F302-4 XP24

artos

F302-4

CARE & MAINTENANCE

5-hole deck mount tub filler

r+s

For best results, keep the following in mind to retain the high quality finish of your artos® faucets:

- Use a soft, dampened sponge or cloth. On no account should you use an abrasive material such as a brush, scouring pad or steel wool to clean surfaces.
- Test your cleaning agent solution on an inconspicuous area before applying to the entire faucet.
- Wipe surfaces clean and rinse completely with water immediately after applying cleaning agent.
- An ideal cleaning technique is to rinse faucet thoroughly and blot dry any water from the surface after each use.

LIMITED LIFETIME WARRANTY

artos® faucets are guaranteed for life against leaks and finishing defects for as long as the original purchaser owns it.

Damage caused by accident, misuse, abuse, improper installation, improper cleaning or alteration will void the warranty. This warranty does not cover replacement parts where damage is caused by normal wear and tear. Westover, Inc is not responsible for labor charges, installation or other incidental or consequential costs. Proof of purchase must be provided with all claims.

Please register this product online at WWW.ARTOS.US.COM

ITEM NO. **F302-4**

SERIAL NO.