
WATERMYRK

BROOKLYN, NEW YORK

Paris 206-EX8500-V

Wall Mounted Exposed Thermostatic Shower with Hand Shower Set




- Wall bracket can be repositioned along the length of the riser body.
- Includes backflow preventors in the hand shower and water supply inlets.
- Uses a 1/2" thermostatic valve.
- Shower Head: SH-RH075
- Hand Shower: SH-S525-B
- Shower Head + Hand Shower Flow Rate: 1.75 gpm @80 psi
- Hose: DS- 5079SM (Length: 49")
- Professional Installation Required



Available in all finishes shown on the Watermark Designs website



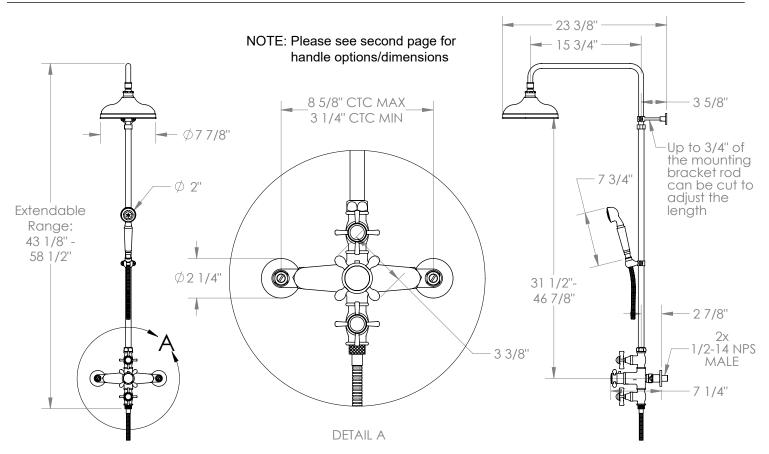

Meets the applicable requirements of ASME A112.18.1-2005/CSA B125.1-05, entitled "Plumbing Supply Fittings". Watermark Designs reserves the right to make revisions without notice to produce specifications. All product dimensions are nominal.


WATERMYRK

BROOKLYN, NEW YORK

206 (PARIS) + 321 (STRATFORD) HANDLE OPTIONS


S1-PRESTON






S1A-NOTTINGHAM






S2- WALTHAM





SWA-DARIEN





V- WALES



